




Nessen.

NAW0580 Solid brass, 5" sconce
(shown with **NAR94** shade)

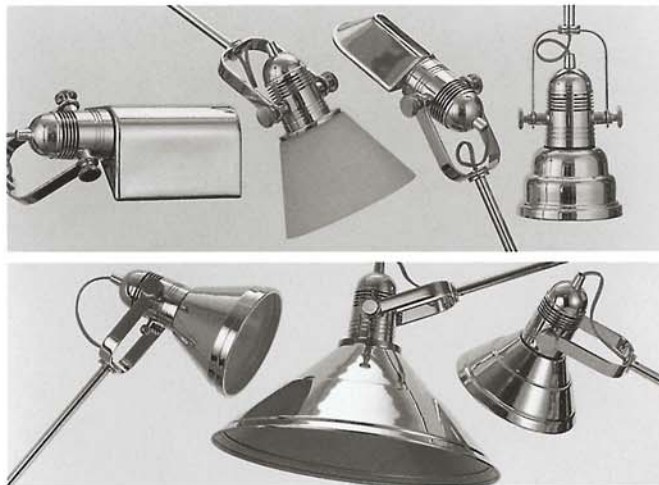

SHADE OPTIONS

(left to right)

NAR90 Solid brass. 75W max.
5 3/4" long, 5 3/4" wide, 2 3/4" deep

NAR94 White frosted glass. 75W max.
6 1/2" diam, 4" deep

NAR95 Solid brass. 60W minican max.
5" long, 3 3/4" wide, 1 3/4" deep

NAR83 Solid brass. 75W max.
4 1/2" diam, 2 3/4" deep


NAR84 Solid brass. 75W max.
5 1/4" diam, 3 1/2" deep

NAR92 Solid brass. 150W max.
13 1/2" diam, 5 1/2" high

NAR91 Solid brass. 75W max.
6" diam, 3" high

NAW0580-0B Wall lamp

Solid brass for outlet box mounting.
4 5/8" x 3 7/8" x 3/4" deep canopy.
Socket housing rotates 180°. Yoke swivels 340°.
Can be used as either uplight or downlight.
One socket controlled by separate wall switch.
Wattage particular to shade chosen.
UL listed, CSA approved.

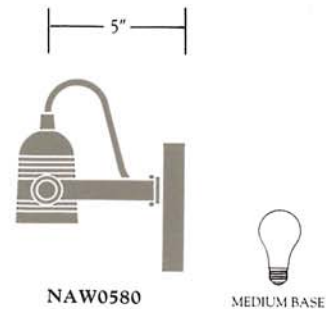

NAW0580-CP

Same as above except with cord and plug.
Furnished with round 36" cord cover in same finish as lamp.
UL listed, CSA approved.

Standard Finishes: Polished Brass, Polished Chrome, Satin Chrome,
Brushed Brass, Polished Nickel, Satin Nickel

Shades: See above for choice.

Optional: On/Off switch on socket housing.

For modifications (eg—3 conductor cord and special contract orders)
see price list or contact your Nessen representative.

Nessen

420 Railroad Way, P.O. Box 187, Mamaroneck, NY 10543 Tel. 914 698 7799 Fax 914 698 5577 www.nessenlighting.com
A Subsidiary of JJI Lighting Group, Inc.